

MAKE EVERY STEP EASIER.

Easier to Deploy. Easier to Stow.

Suburban Lift Assist Composite Stow-Away Steps help make RV entry setup smoother and more controlled, with lift-assist operation, adjustable ground-contact legs, composite tread confidence, and fit options for a wide range of RV applications.

Designed for OEMs, dealers, distributors, and RV owners alike, these steps bring together everyday usability, dependable support, and a cleaner entry experience from the ground up.



LIFT-ASSIST OPERATION

Helps reduce lifting effort during deployment and stow-away, making step movement smoother and easier to manage.



ADJUSTABLE GROUND CONTACT

Easy-adjust legs help support a stable step position across varied campsite, driveway, and service-lot surfaces.



COMPOSITE TREAD CONFIDENCE

Durable composite treads with molded texture help support footing while standing up to everyday RV entry use.



FLEXIBLE RV FIT

Available in 3-step and 4-step configurations with narrow and wide options to support a range of RV applications

ONE SYSTEM. THREE MOMENTS OF EASE.

Deploy with control. Step with confidence. Stow with less effort.

Suburban Lift Assist Composite Stow-Away Steps are designed around the repeated moments that matter most: setting up the entry, stepping in and out throughout the day, and stowing the steps when it is time to move.



1 UNLOCK + DEPLOY

Move the steps from the stored position with lift-assist support for smoother control.

2 ADJUST + STABILIZE

Extend each ground-contact leg as needed to help position the step assembly before use.

3 STEP IN + STOW

Use the steps for everyday RV entry, then lift and stow with reduced effort when travel resumes.



READY TO MAKE ENTRY EASIER?

Ask your Suburban Sales Representative, distributor, or dealer about Lift Assist Composite Stow-Away Steps.



SCAN TO
LEARN
MORE

TECHNICAL SNAPSHOT


MODEL OPTIONS:	3-STEP (NARROW / WIDE)	4-STEP (NARROW / WIDE)
Nominal Door Width:	26"-30" Narrow / 30"-34" Wide	
Door Opening / Latch Adjustment:	23.25"-28.75" Narrow 26.75"-32.25" Wide	
Floor Height Range:	27.75"-37.875" for 3-step Narrow 36.25"-46.375" for 4-step Wide	
Extension from Coach:	32.25" for 3-step	40.75" for 4-step
Stowed Clearance:	17.25"-18.25" inside depth 48.5"-60.5" inside height above floor	
Step Width:	20" Narrow / 23.5" Wide	
Top Step Depth / Run:	13"	
Common Step Height / Rise:	8.5"	
Load Limit:	500 lbs	
Regulatory Compliance:	Conforms to RVIA RVEC-1	

BUILT FOR THE ENTRY POINT THAT MATTERS MOST.

Images and illustrations are for representation purposes only. Actual product appearance, features, and functionality may vary from what is shown.

DETAILED TECHNICAL SPECIFICATIONS		3-STEP				4-STEP			
		NARROW		WIDE		NARROW		WIDE	
		4607A		4608A		4609A		4610A	
DIM	DESCRIPTION	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
	Nominal Door Width	26"	30"	30"	34"	26"	30"	30"	34"
A	Door Opening, Latch Adjustment	23 1/4"	28 3/4"	26 3/4"	32 1/4"	23 1/4"	28 3/4"	26 3/4"	32 1/4"
B	Floor Height	27 3/4"	37 7/8"	27 3/4"	37 7/8"	36 1/4"	46 3/8"	36 1/4"	46 3/8"
C	Extension from Coach	32 1/4"				40 3/4"			
D	Width Excluding Latch	23 1/8"		26 1/2"		23 1/8"		26 1/2"	
E	First Step Height	3"	13 1/8"	3"	13 1/8"	3"	13 1/8"	3"	13 1/8"
F	Bottom of Stringer to Ground	1 1/4"	11 3/8"	1 1/4"	11 3/8"	1 1/4"	11 3/8"	1 1/4"	11 3/8"
G	Top of Stringer to Ground	24 1/8"	34 3/8"	24 1/8"	34 3/8"	32 5/8	42 7/8"	32 5/8	42 7/8"
H	Inside Depth from Exterior Threshold (Stowed)	17 1/4"				18 1/4"			
I	Inside Height Above Floor (Stowed)	48 1/2"				60 1/2"			
J	Common Step Height/Rise	8 1/2"							
K	Step Width	20"		23 1/2"		20"		23 1/2"	
L	Overall Product Width	30 3/8"		33 7/8"		30 3/8"		33 7/8"	
	Top Step Depth/Run	13"							
	Leg Material	Extruded Alumimun							
	Tread Material	Composite							
	Hinge, Latch & Stringer Material	Steel							
	Color	Flat Black Powder Coat							
	Load Limit	500 lbs							
	Total Product Weight*	50lbs		55lbs		56lbs		61lbs	
	Regulatory Compliance	Conforms to RVIA RVEC-1							

* Stairs with composite treads weigh up to 5% less.

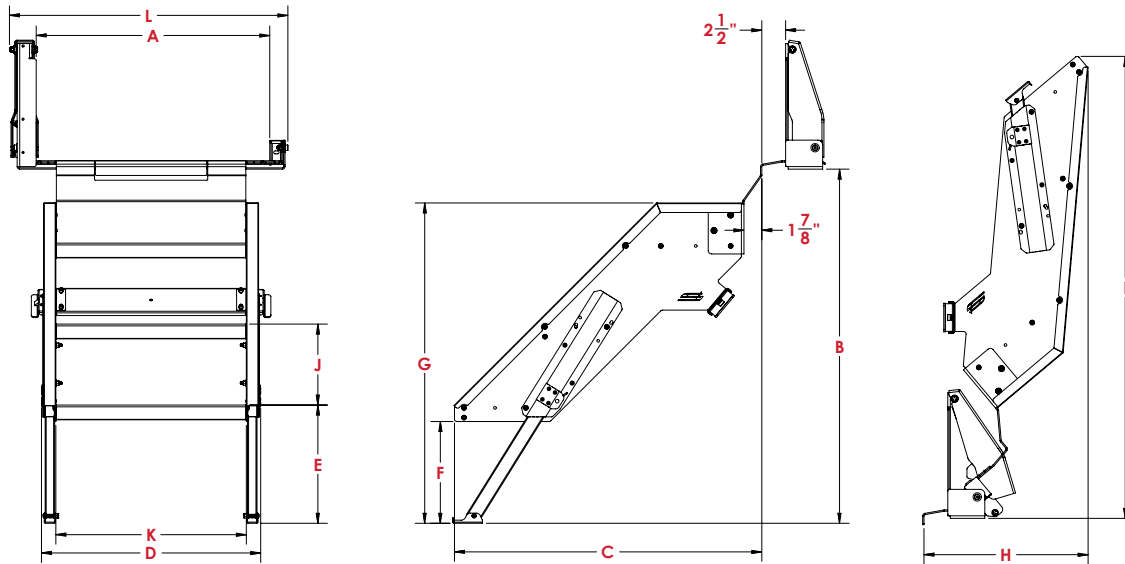

FEATURES AT A GLANCE

- Lift-Assist Operation**

Helps reduce lifting effort during deployment and stow-away for a smoother, more controlled user experience.

- Adjustable Ground Contact.**

Easy-adjust legs help the steps meet the ground properly and support a stable entry position.

- Independent Leg Adjustment**

Each leg adjusts separately to help accommodate uneven campsite or parking conditions.

- Composite Tread Confidence**

Durable composite treads with molded texture help support footing, resist everyday wear, and allow water, dirt, and small debris to clear through the open tread design.

- Flexible Fit Options**

Available in 3-step and 4-step configurations with narrow and wide platform options.

- Built for RV Entry Use**

Rated for a 500 lb. load limit and conforms to RVIA RVEC-1 requirements.